


Harbor Master Installation Guide


*** DANGER - CAUTION ***

Always Lower The Boat Lift Before Attempting Assembly.

Tools Required: Crescent Wrench and 9/16 Wrench.

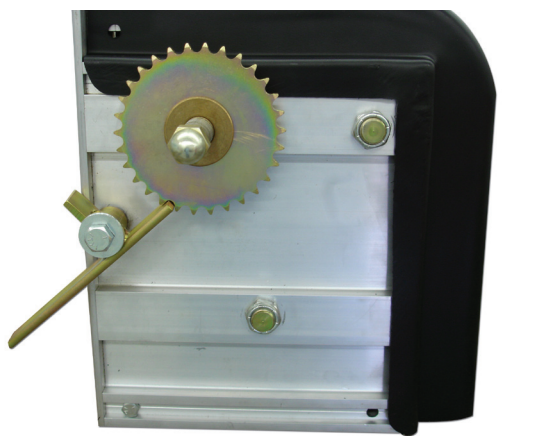


1. Lower the Boat Lift.
2. Remove the Acorn Nut and Wheel.

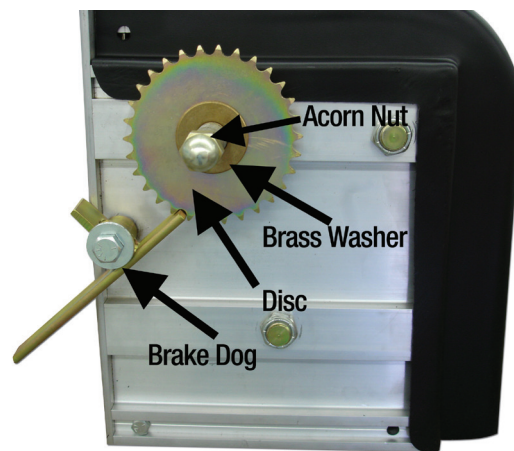


3. Remove the Brake Dog, Brass Washer and the Disc.




You Will Not Use these Pieces any longer.

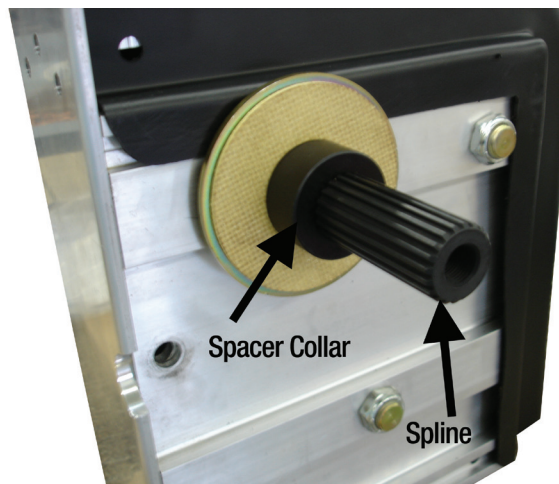


4. Install the Spline and the Spacer Collar.

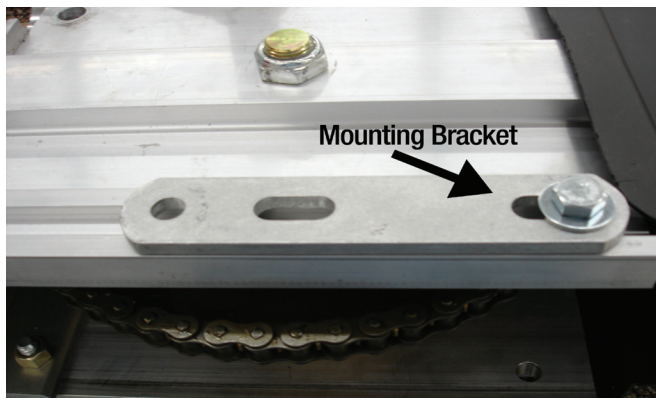

5. Install the Mounting Bracket.

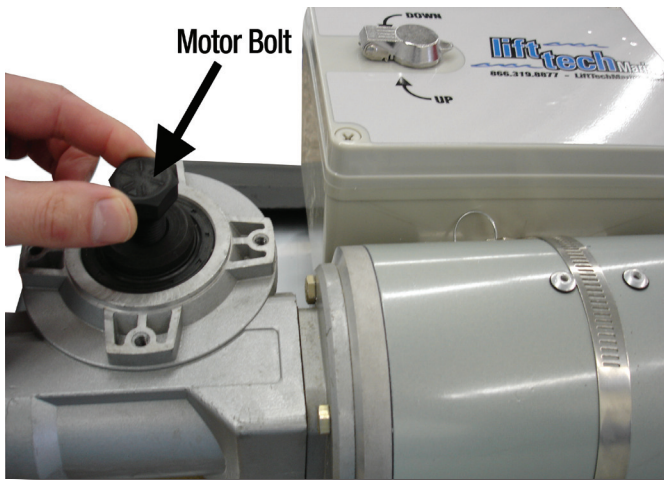


6. Install the Motor onto the Shaft. Install the Bolt and Washer onto the Motor and Tighten to Approximately 70 Foot Pounds.

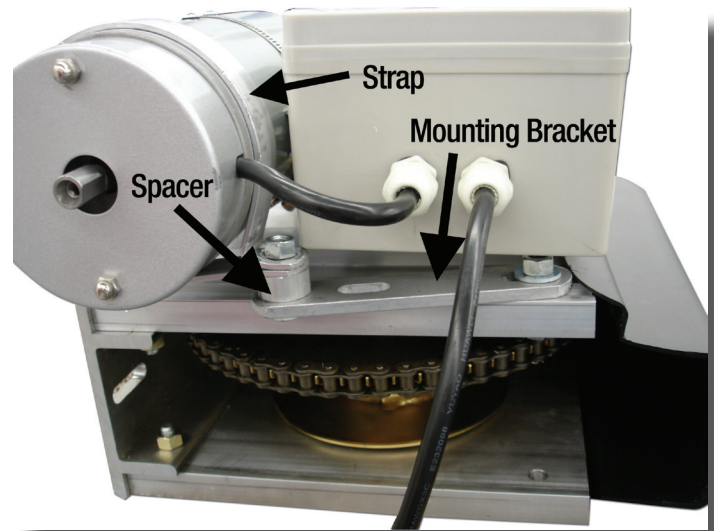

7. Install the motor strap around the motor and connect the strap and bracket with the spacer provided.



8. Tighten the Strap and Bracket Bolts.

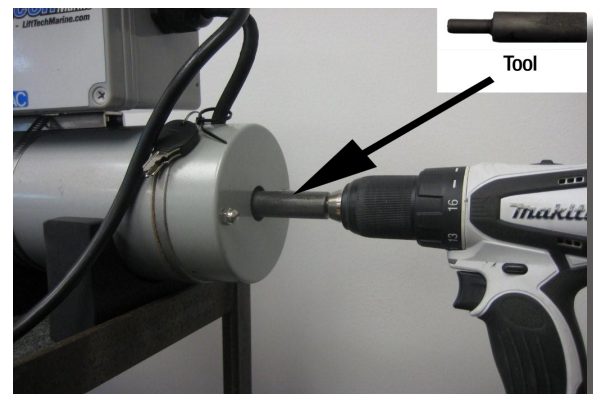

In Case of a Power Outage. This Tool May be Inserted Into a Drill to Raise or Lower Your Lift. First Remove Rubber Cap From Motor Shaft.

Plug in and Enjoy!

Recommended Extension Cords up to 150 feet 12/3.

Any question regarding Electrical current requirements please call your Authorized Dealer or Lift Tech Marine 1-866-319-8877.

*** DANGER - CAUTION ***

All power used on your dock or lift needs to be GFI protected at the shore line.


www.lifttechmarine.com

Harbor Master Installation Guide


*** DANGER - CAUTION ***

Always Lower The Boat Lift Before Attempting Assembly.

Tools Required: Crescent Wrench and 9/16 Wrench.

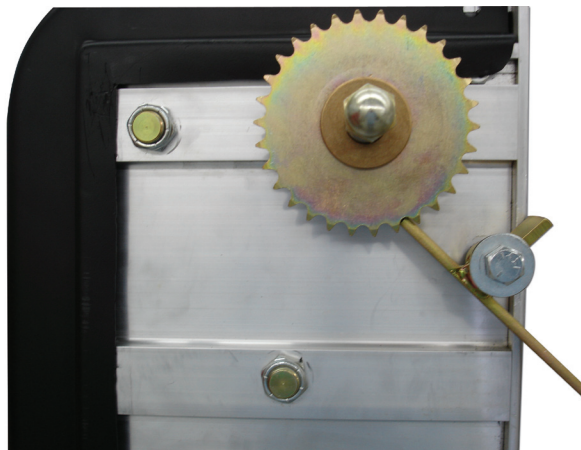


1. Lower the Boat Lift.
2. Remove the Acorn Nut and Wheel.

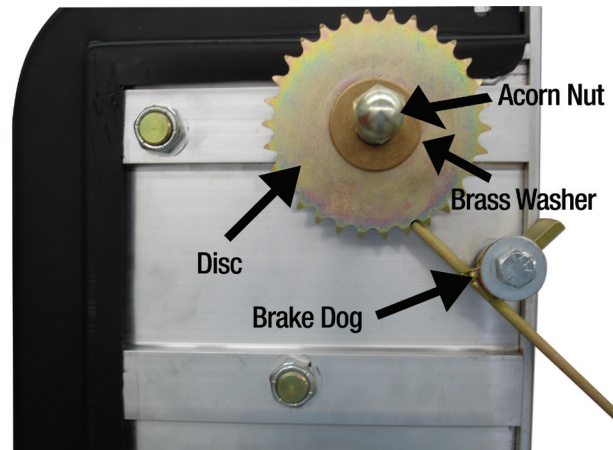


3. Remove the Brake Dog, Brass Washer and the Disc.




You Will Not Use these Pieces any longer.

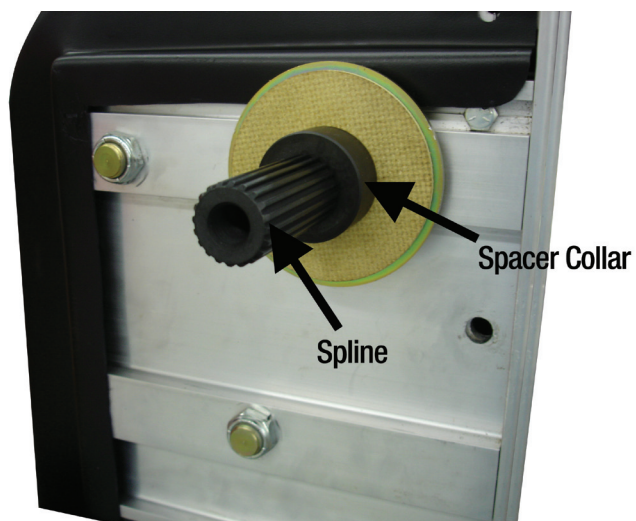


4. Install the Spline and the Spacer Collar.

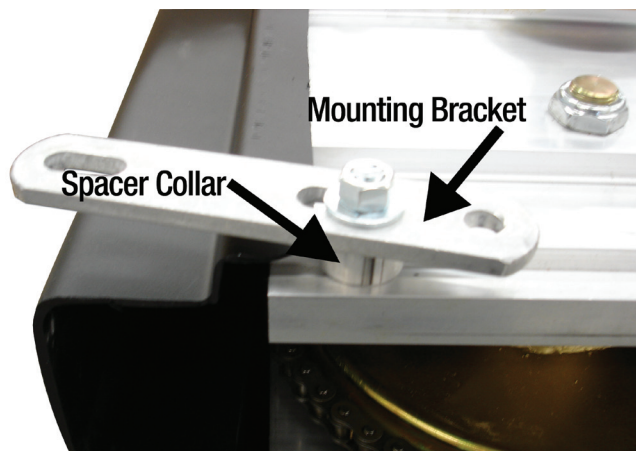


5. Install the Mounting Bracket and Spacer.

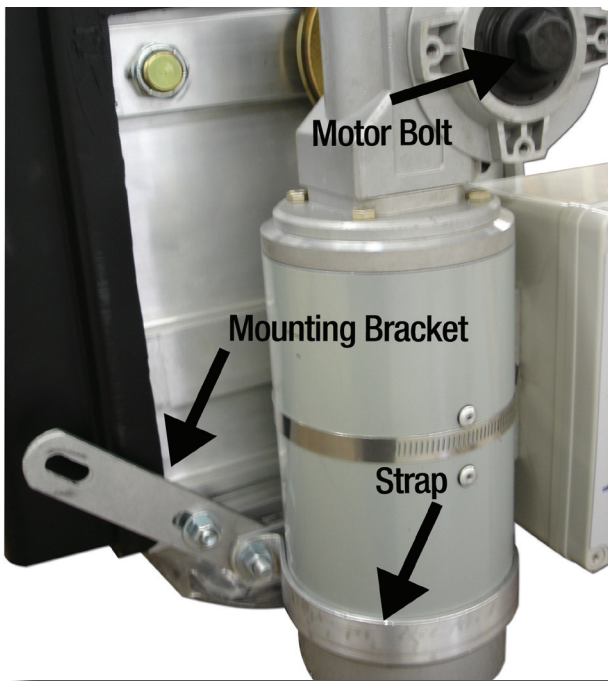

6 .Install the Motor onto the Shaft. Install the Bolt and Washer onto the Motor and Tighten to Approximately 70 Foot Pounds.

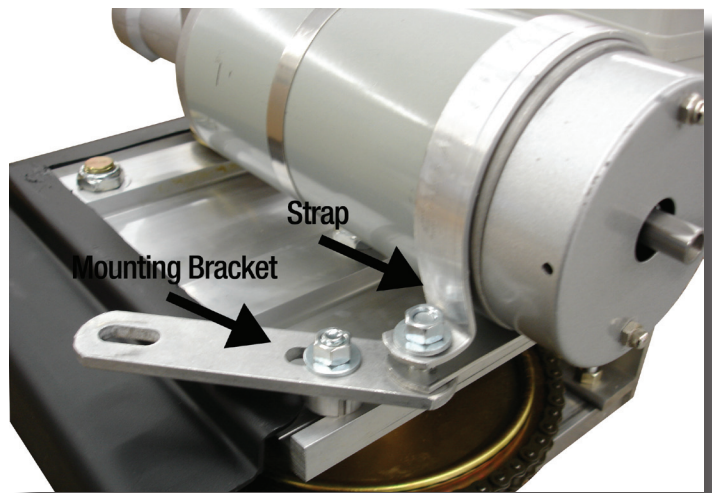

7. Install the motor strap around the motor and connect the strap and bracket with the spacer provided.

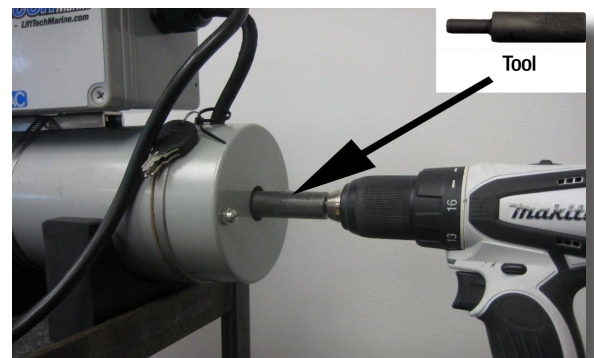

In Case of a Power Outage. This Tool May be Inserted Into a Drill to Raise or Lower Your Lift. First Remove Rubber Cap From Motor Shaft.

Plug in and Enjoy!

8. Tighten the Strap and Bracket Bolts.

Recommended Extension Cords up to 150 feet 12/3.

Any question regarding Electrical current requirements please call your Authorized Dealer or Lift Tech Marine 1-866-319-8877.

*** DANGER - CAUTION ***

All power used on your dock or lift needs to be GFI protected at the shore line.

www.lifttechmarine.com